


## Bando Wiper Edge EX

Special polyurethane seal blade for machining tool

# Bando Wiper Edge EX

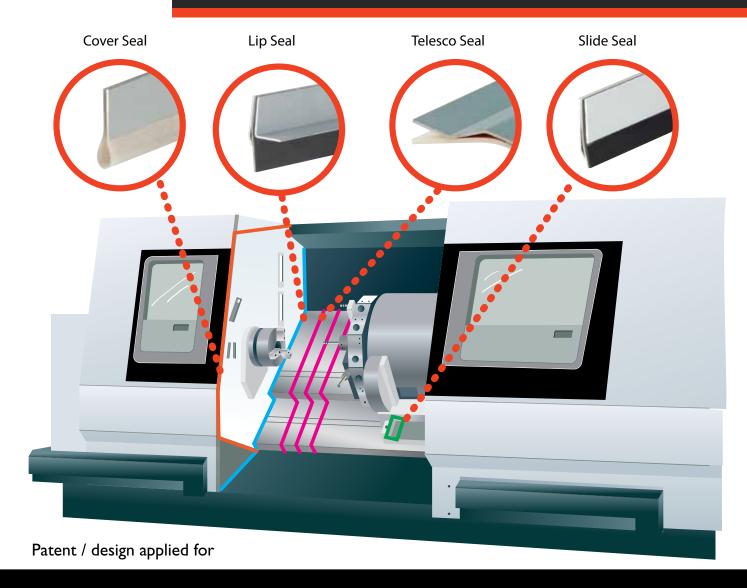

## **FEATURES**


- Less machine stop due to the leakage of coolant
- No abnormal noise by coolant and abration resistance
- Long life of motor (coolant resistance)



special polyurethane rubber (low coefficient of friction material)

## **Performance**

### Coolant Resistance (test condition) 70°dipping

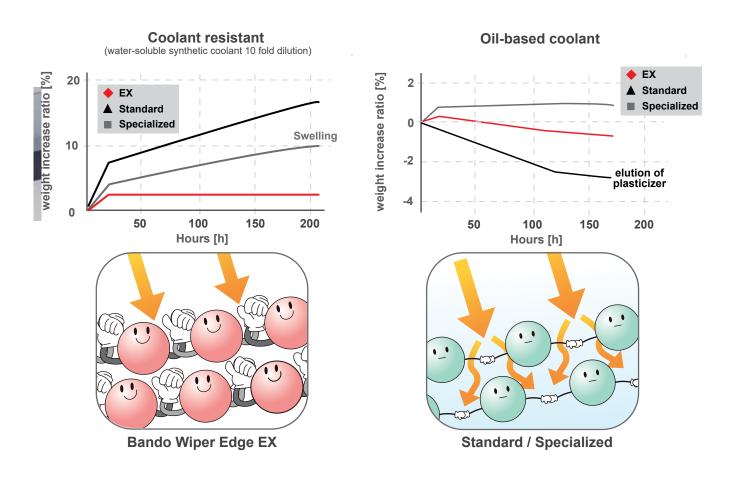


## **PERFORMANCE**

### **Abration Resistance(High Speed Sliding Ability)**

## General requirements for seal blade

- Turning machine: Coolant Resistance
- Machining Center: High Speed Sliding Ability: Bando Wiper EX meets on customer's request



### Long Life (Abration Resistance)



Bando Wiper Edge EX

Rare Friction


#### **Test Condition**

Chip: Alminum

Coolant : Molesco Neo Cool Bio-60E

Movement Speed: 100 m/min Recommended press-fit width: 3.0mm Running Distance: 300km (150,000 times of 1 m back and forth motion)


## **LINEUP**

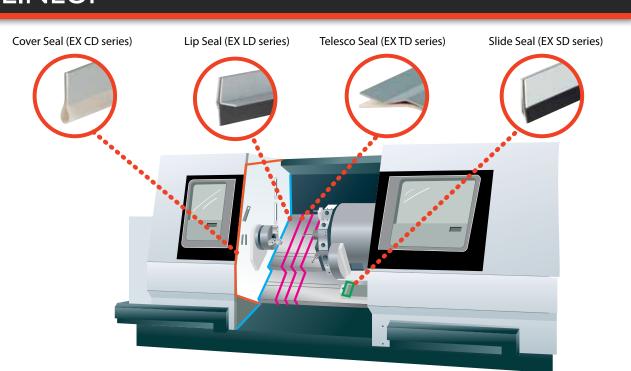






## **Product Line-Up**

## **LINEUP**









- \*I Total Length
- \*2 Recommended press-fit width Other size on request
- \* Please note that this catalogue is reserved to changes. All data in this publication have been compiled and checked with utmost diligence, nevertheless errors and mistakes cannot be totally excluded. Do not duplicate or copy any part or contents without the permission of Bando Europe GmbH.

E-Mail: info@bando.de Web: www.bando.de